

# AJAX<sup>®</sup> Oxidizing Catalytic Converter

Engineered for Your Environment



The AJAX Oxidizing Catalytic Converter offers reliable reduction exhaust emissions.




The AJAX® product team introduces an oxidizing catalytic converter designed to meet the new environmental guidelines for 2-stroke lean burn (2SLB) gas engines. As a result of an exhaustive research and development program, the converter is now available for new units as well as retrofit applications. Patent pending.

**Performance Results: Exhaust Emissions Data**

	Standard 2803LE or 2804LE	Performance with Oxidizing Converter
Site Rated BHP per cylinder	200	200
NOx (gm/BHP-hr)	2.0	2.0
CO (gm/BHP-hr)	1.2	0.20
NMHC (gm/BHP-hr)	1.2	0.45
NMNEHC (gm/BHP-hr)	0.5	0.15
H <sub>2</sub> CO (gm/BHP-hr)	0.30	0.08
Exhaust Flow (ACFM per cyl.)	1530	1555
Exhaust Temp. (°F)	515	530

Site Conditions: Elevation of <1,500 FASL, operating with pipeline quality fuel gas.

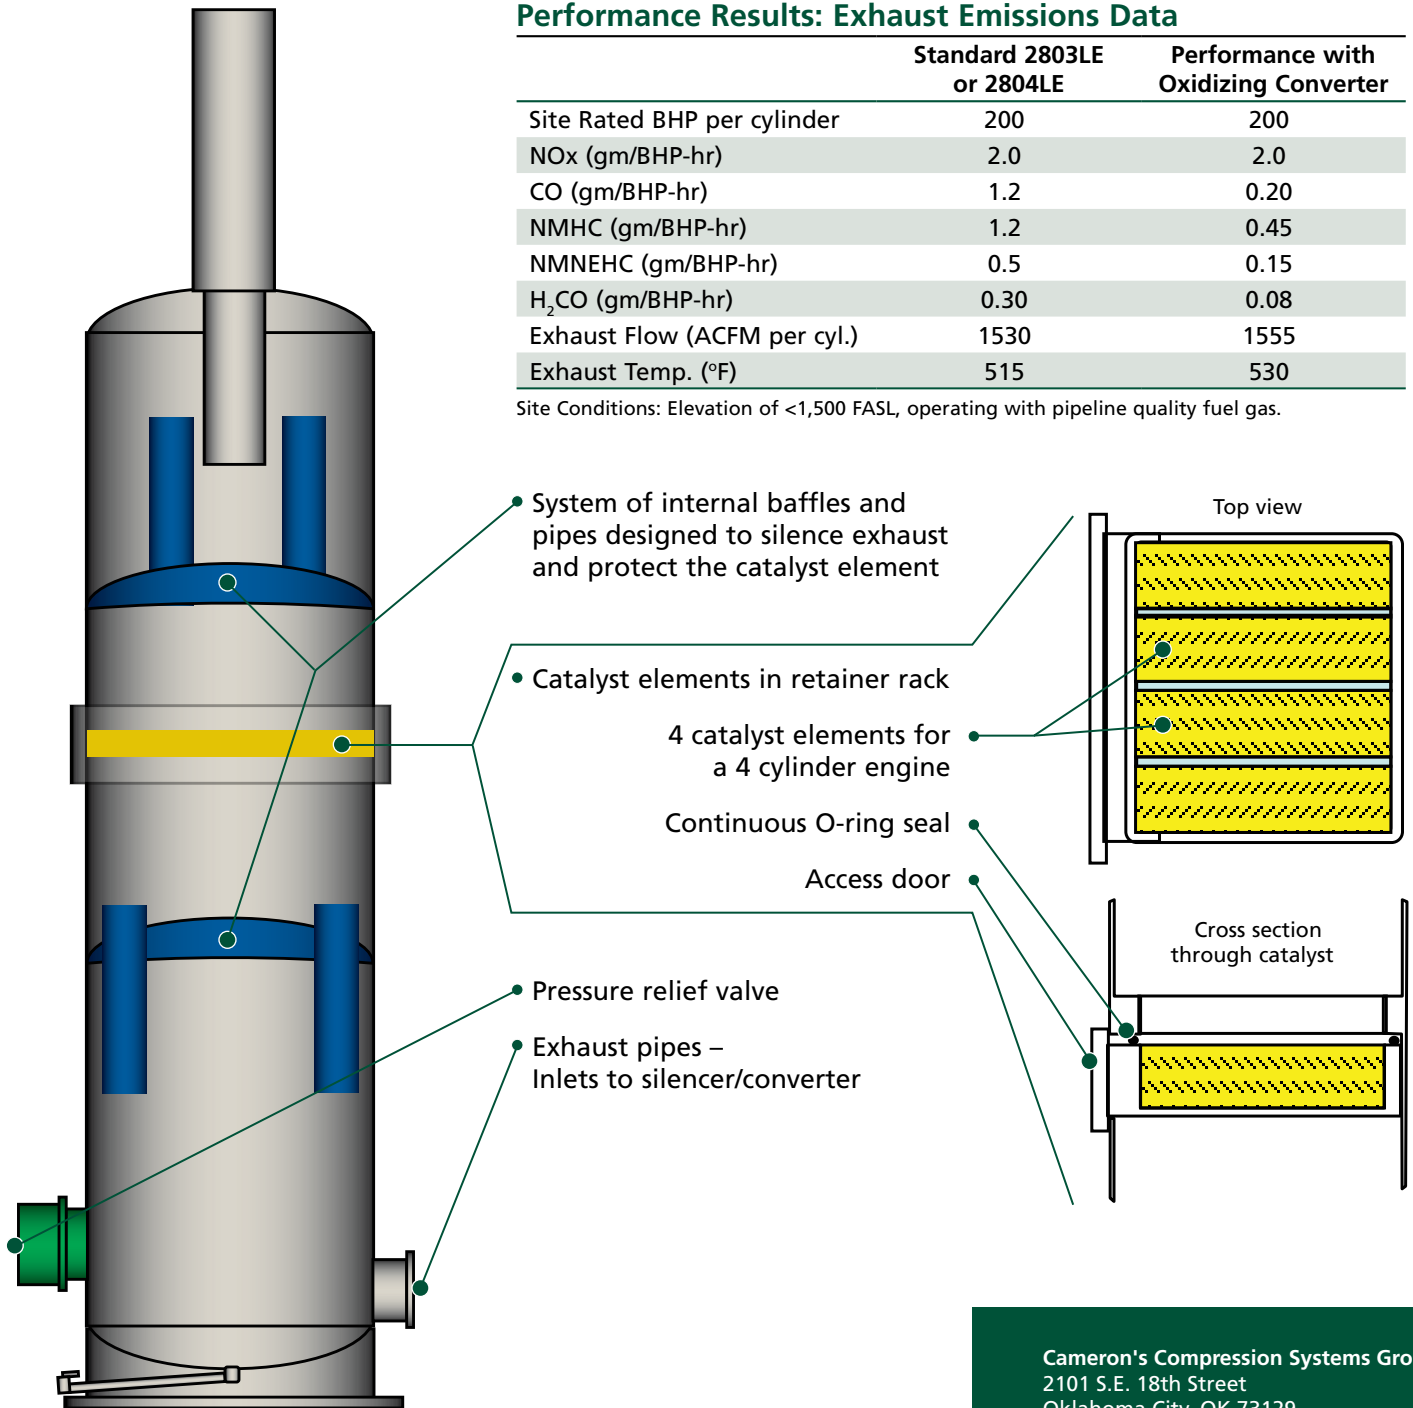

Cameron's Compression Systems Group  
 2101 S.E. 18th Street  
 Oklahoma City, OK 73129  
 USA  
 Tel 405.670.4121

[www.c-a-m.com/cs](http://www.c-a-m.com/cs)

Cameron strives for continuous improvement in all aspects of our business. Cameron reserves the right to modify designs and specifications without notice or obligation. Nothing contained in this brochure is intended to extend any type of warranty, expressed or implied.

