

Dräger Polytron 8720

Stationary gas detector (PIR 7200)

Quick and reliable detection of carbon dioxide in the ambient air: the microprocessor-based Polytron 8720 transmitter, which contains a new, innovative IR sensor with drift-free optics, can also be integrated into your digital fieldbus system, thus providing additional diagnostic functions.



SIMPLE INSTRUMENT MANAGEMENT THANKS TO DIGITAL COMMUNICATION

With its HART® ability, the Dräger Polytron 8720 allows remote access using the Dräger PolySoft 8000 software for the quick and convenient evaluation of the instrument status. Integration in existing management systems (e.g. PactWare) is also possible using DTM. In addition, fieldbus systems such as Foundation Fieldbus or Profibus are supported by corresponding interfaces.

EFFICIENT, STABLE AND ROBUST – DRÄGER PIR 7200

With short response times and a high signal stability, the Dräger PIR 7200 offers a high degree of safety – thanks to an extremely light-efficient optics with a 4-beam signal-stabilizing system. Another advantage is its low sensitivity to dust, dirt

deposits or insects on the optical surfaces in the measuring cuvette, while offering a drift-free output signal and longer maintenance intervals.

PROVEN – AND STILL GETTING BETTER: DRÄGER MEASUREMENT TECHNOLOGY

Dräger has been developing and manufacturing sensors and gas detectors for industrial use for more than 40 years. And with each new device generation, we drive our measurement technology a bit further. With the Polytron 8720, you will definitely benefit from this experience and power of innovation. Its DrägerSensor is based on an open, double-compensated optical infrared system.



Dräger Polytron 8720
Flameproof transmitter for monitoring carbon dioxide



Dräger Polytron 8720
Connected e-Box to be wired in increased safety.


Same design, same operating principle: The Polytron 8000 series

The Dräger Polytron 8720 is part of the Polytron 8000 series. All transmitters of this series have the same design and user interface, which guarantees a uniform operating philosophy. Your advantage: less training requirement and easier maintenance.

Weitere Transmitter der Polytron 8000-Serie:

- Dräger Polytron 8000 (EC stationary gas detector)
- Dräger Polytron 8200 (CatEx stationary gas detector)
- Dräger Polytron 8310 (DSIR stationary gas detector)
- Dräger Polytron 8700 (PIR 7000 stationary gas detector)

DRÄGER POLYTRON 8000 WITH E-BOX / DOCKING STATION ATTACHED

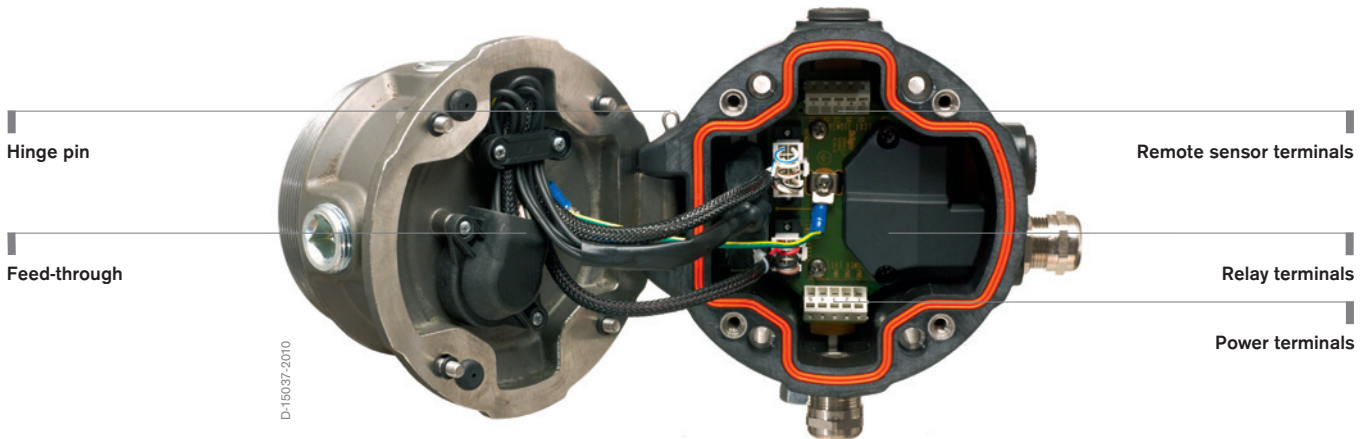

OPTIONAL: THREE RELAYS FOR CONTROLLING EXTERNAL EQUIPMENT

On request, the Dräger Polytron 8720 can be supplied with three integrated relays. This enables you to use it as an independent gas detection system with two arbitrarily adjustable concentration alarms and one fault alarm. Audio alarms, signal lights, or similar devices can, thus, be controlled locally – without an additional cable between the transmitter and a central controller. The sensor signal can be evaluated using the 4 to 20 mA signal.

OPTIONAL: TWO MOUNTING SETS FOR EASY FLANGE-MOUNTING

The housing has four mounting holes. Two different mounting sets are available for installing the Polytron 8720: a duct-mount and a pipe-mount set. This means that the transmitter can be easily installed anywhere – e.g., on a smooth wall, a pipe or an exhaust duct.

QUICK AND EASY WIRING

The electronics and the bezel form a single unit. Simply pull them out of the housing. Then insert the three-wire cable into the terminals – either through the Ex-e cable gland or through the seal on the conduit. Finally, plug the terminal block into the PCB.

ADDITIONAL ADVANTAGES:

- Easy and cost-effective: one-man calibration
- Available as flameproof or increased safety version
- Aluminium or 316 L stainless steel housing for the most extreme industrial conditions
- Extremely user-friendly software thanks to a minimum number of menu items
- Backlit display: easy to read, even in the dark and without a flash light
- Traffic light status indicator (green = no danger, yellow = error, flashing red = gas alarm)
- Beam block warning signal if the optics are heavily contaminated
- Measuring ranges in the ppm and Vol.% range
- Matrix display allows the flexible setting of measuring ranges and units
- SIL 2 certified by the German TÜV Süd

TECHNICAL DATA

Dräger Polytron 8720

Type	Flameproof 'd' or combined increased safety 'd/e' transmitter			
Gases	Carbon dioxide			
Measuring ranges	ppm or Vol%; user adjustable 0 to 0.2 up to 30 Vol%			
Display	Backlit graphic LCD; 3 status LEDs (green/yellow/red)			
Electrical data	Analog signal output	Normal operation	4 to 20 mA	
		Maintenance	Steady 3.4 mA or 4 mA ± 1 mA 1 Hz modulation; user selectable	
		Fault	< 1.2 mA	
	Digital signal output	HART®		
	Supply voltage	10 to 30 VDC, 3-wire		
	Relay rating (option)	2 alarm, 1 fault relay, SPDT 5 A @ 230 VAC, 5 A @ 30 VDC, resistive load		
Ambient conditions (see also sensor data sheet)	Temperature	- 40 to + 176 °F / - 40 to + 80 °C		
	Pressure	20.7 to 38.4 inch Hg / 700 to 1300 mbar		
	Humidity	0 to 100% RH, non-condensing		
Enclosure	Transmitter housing	Epoxy-coated copper free aluminium or 316L stainless steel		
	Enclosure rating	NEMA 4X & 7, IP 65/66/67		
	Cable entry	¾" NPT female conduit or M20 cable gland		
	Size (l x w x d, approx.)	without e-Box	5.9" x 11.4" x 5.1" / 150 x 290 x 130 mm	
		with e-Box	7.1" x 11.8" x 7.4" / 180 x 300 x 190 mm	
	Weight (approx.)	without e-Box aluminium	8.5 lbs / 3.9 kg	
		without e-Box, 316 stainless steel	12.6 lbs / 5.7 kg	
		with e-Box aluminium	11.5 lbs / 5.2 kg	
with e-Box, 316 stainless steel		15.6 lbs / 7.1 kg		
Approvals *)	UL **)	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6		
	CSA ***)	Class I, Div 1, Groups A, B, C, D; Class II, Div 1, Groups E, F, G Class I, Zone 1, Group IIC; T-Code T4/T6		
	IECEx	Ex d IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'd' version		
		Ex de IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'e' version;		
		Ex tb IIIC T80/130 °C Db		
	ATEX	II 2G Ex d IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'd' version		
II 2G Ex de IIC T6/T4 Gb, -40 ≤ Ta ≤ +40/+80 °C; 'e' version;				
CE markings	II 2D Ex tb IIIC T80/130 °C Db ATEX (Directive 94/9/EC) Electromagnetic Compatibility (Directive 2004/108/EC) Low Voltage (Directive 2006/95/EC)			

*) All e-Box versions are only ATEX / IECEx approved.

**) With relay Ta ≤ 70 °C

***) Pending

ORDER INFORMATION**Dräger Polytron 8720 Type CO₂**

	Aluminum 'd'	SS316L 'd'	Aluminum 'e'	SS316L 'e'
Without relays	45 44 709	45 44 718	45 44 727**)	45 44 736**)
With relays	45 44 710	45 44 719	45 44 728**)	45 44 737**)
Remote version w/o relays			45 44 745*)	45 44 754*)
Remote version w/ relays			45 44 746*)	45 44 755*)

*) Order Dräger PIR 7200 Remote 'e' Version and e-Box 68 12 275 separately.

***) Order e-Box 68 12 420 for power only wires separately.

****) Order e-Box 68 12 275 for power and/or relay wires separately.

Magnetic wand for menu access (blue body, white logo)	45 44 101
e-Box Power only version (includes 1 cable gland) / Docking Station	68 12 420
e-Box Power, Relay and/or Remote version (includes 2 cable glands) / Docking Station	68 12 275
Cable Gland e-Box	68 12 868
Pipe Mount Kit	45 44 198
Duct Mount Kit Polytron 8720 for PIR 7X00	68 12 300
Duct Mount Kit Flow Cell for PIR 7X00	68 11 945
Duct Mount Kit Bump Test Adapter for PIR 7X00	68 11 990
Status Indicator for PIR 7200	68 11 920
Splash Guard for PIR 7200	68 11 912
Flow Cell for PIR 7200	68 11 910
Bump Test Adapter for PIR 7200	68 11 930
Insect Guard for PIR 7X00	68 11 609
Hydrophobic Filter for PIR 7X00	68 11 890
Calibration Adapter for PIR 7X00	68 11 610
Process Adapter for PIR 7X00, POM (Polyoxymethylene)	68 11 915
Process Adapter for PIR 7X00, Stainless Steel	68 11 415
Junction Box Aluminium for Remote Mount 'd'	45 44 099
Junction Box Stainless Steel for Remote Mount 'd'	45 44 098
Spacer	68 12 617
Dräger PIR 7200 CO2 for Remote 'e' Version	68 12 290

HEADQUARTERS

Dräger Safety AG & Co. KGaA
Revalstrasse 1
23560 Lübeck, Germany

www.draeger.com

SYSTEM CENTERS**P. R. CHINA**

Beijing Fortune Draeger Safety
Equipment Co., Ltd.
A22 Yu An Rd, B Area,
Tianzhu Airport Industrial Zone,
Shunyi District, Beijing 101300
Tel +86 10 80 49 80 00
Fax +86 10 80 49 80 05

GERMANY

Dräger Safety AG & Co. KGaA
Revalstrasse 1,
23560 Lübeck
Tel +49 451 882-2794
Fax +49 451 882-4991

FRANCE

Dräger Safety France SAS
3c route de la Fédération, BP 80141
67025 Strasbourg Cedex 1
Tel +33 3 88 40 59 29
Fax +33 3 88 40 76 67

SINGAPORE

Draeger Safety Asia Pte Ltd
67 Ayer Rajah Crescent #06-03
Singapore 139950
Tel +65 68 72 92 88
Fax +65 65 12 19 08

UNITED KINGDOM

Draeger Safety UK Ltd.
Blyth Riverside Business Park
Blyth, Northumberland NE24 4RG
Tel +44 1670 352 891
Fax +44 1670 544 475

USA

Draeger Safety, Inc.
505 Julie Rivers, Suite 150
Sugar Land, TX 77478
Tel +1 281 498 1082
Fax +1 281 498 5190