

Polytron Pulsar Duct Mount

The Polytron Pulsar Duct Mount gas detector offers the latest infrared technology for monitoring ducts and enclosed paths for a wide range of gaseous hydrocarbons. These include the alkane series from methane to hexane, propylene, methanol, ethanol and ethylene.



SIMPLE, ALIGNMENT AND COMMISSIONING

One person can easily align and commission the system without the need for special training or skills. A hand held terminal provides separate “radar” display of the transmitter and receiver alignments. This makes it easy to optimise the adjustment for maximum signal strength.

The built-in calibration of the Polytron Pulsar Duct Mount does not need any manual adjustment or standard test gas. After the alignment procedure is finished a self-zeroing sequence is started to complete the commissioning of the system. The parameters about alignment and signal strength are logged and will be used to determine any future misalignment or build up of deposits on the optical lenses.

INCREASED PERFORMANCE


Continuous communication between Receiver and Transmitter across a signal line ensures the highest availability. The high power xenon lamps are combined with a sophisticated algorithm which varies their intensity and frequency. This enables a higher flash rate to be triggered by the first indication of gas, allowing a fully validated gas reading along with a greatly reduced response time of less than 1 second.

FAILSAFE

The detector is designed so that no fault can go undetected. In normal operation the output signal is 4 to 20 mA, depending on the gas concentration measured. Whereas a signal of < 1 mA indicates a fault and a signal of 2 mA indicates a beam blockage. In addition a continuous self-test of the Polytron Pulsar Duct Mount will issue a prewarning signal of 3.5 mA where the detector is still operational but requires some attention – for example when there is a build up of deposits on the optics, or misalignment of the transmitter or receiver. This way maintenance can be scheduled without downtime. The Polytron Pulsar Duct Mount carries a Safety Integrity Level rating of 2 (SIL 2).

BUILT-IN DATA LOGGER

An internal data-logger keeps a detailed record for the previous 7 days of operation, and consolidated records for the previous 32 weeks. These logs include such essential information as actual readings, events like “beam block” and gas alarms, warning flags, signal strength, alignment, supply voltage and internal temperature.



ST-3158-2003

Polytron Pulsar
Open Path Gas
Detector for gaseous
hydrocarbons in ducts.

GAS LIBRARY

The detector can be pre-calibrated for up to four gases. Each detector is supplied with methane and propane calibration as standard which are field selectable by the user.


WORLDWIDE APPROVALS

The Polytron Pulsar Duct Mount can be used worldwide with the following approvals: ATEX, IECEx, UL, CSA, and GOST.

THE HAND HELD TERMINAL

The hand held terminal (HHT) is a robust weatherproof unit, certified for use in

a hazardous, classified area. The terminal is used to align and zero the Polytron Pulsar Duct Mount transmitter and receiver, and to provide configuration and diagnostic functions. More comprehensive diagnostics are provided in conjunction with Polytron Pulsar PC software and a personal computer located in the non-hazardous area, when using the AI500 digital interface.

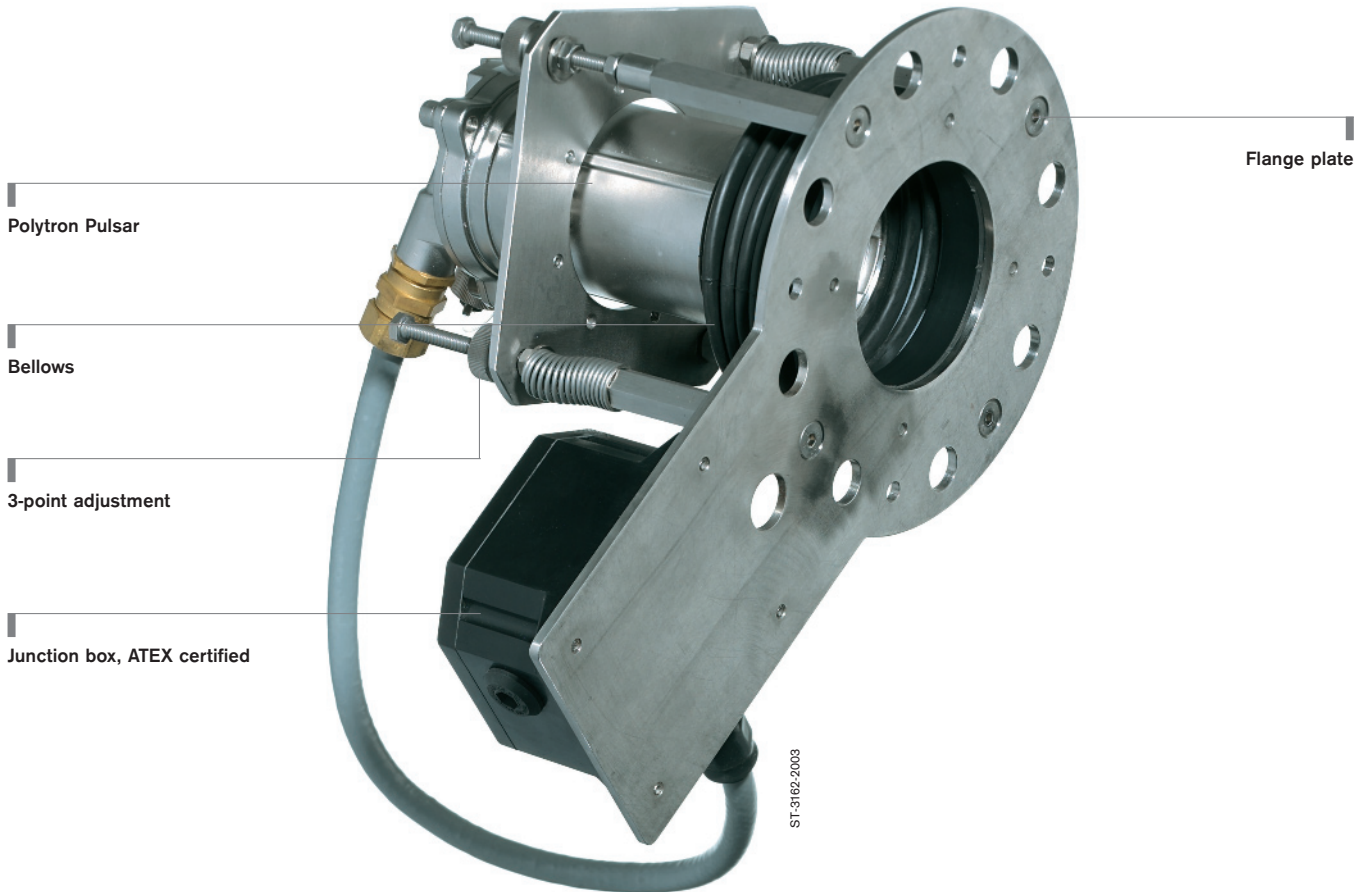

ORDER INFORMATION

Type	Order Code
Polytron Pulsar Duct Mount, ATEX certified	23 50 419
Polytron Pulsar Duct Mount, UL certified	23 50 420
Polytron Pulsar Duct Mount, CSA certified	23 50 421
Accessories	
Remote Junction Box Kit	23 50 322
Junction Box, ATEX certified	23 50 298
AI500 digital interface	23 50 306
Alignment Kit with HHT, test cards and ball driver with case	23 50 325
Adapter AI500 to HHT or PC	23 50 326
Polytron Pulsar PC Software with cable (supports Polytron Pulsar, AI500 and HHT)	23 50 327
Data wand for AI500	23 50 238
HART configuration	23 50 446
Polytron Pulsar Duct Wall mounting plate kit	23 50 450
Polytron Pulsar Duct Mount gas test sheets	23 50 451

ST-9531-2003



AI500 and Adapter Cable
Digital interface to HHT
or a PC.

ST-977-2001



Hand Held Terminal (HHT)
For easy alignment.

TECHNICAL DATA

Type	Explosion proof Duct Mount gas detector utilizing dual wavelength infrared absorption technique		
Gases	Wide range of hydrocarbons including the alkane series from methane to hexane, propylene, ethanol and methanol.		
Range	0 to 100 %LEL		
Factory calibration	Methane or propane, selectable. Other hydrocarbon gases on request		
Operating distance	1 to 8 m, 3.3 to 26.2 ft separation of transmitter and receiver		
Signal output	Analog	Measuring	4 to 20 mA
		Pre-warning	3.5 mA, dirty optics or misalignment
		Beam block	2 mA
		Fault	< 1 mA
	Digital	HART	
Supply Voltage	ATEX	18 to 32 VDC	
	UL, CSA	18 to 27 VDC	
Power Consumption	Max. 0.95 A @ 24 V, with full heating and all source lamps operating		
Response time t95	< 1 s		
Ambient conditions	Temperature	- 40 to + 60 °C, - 40 to + 140 °F	
	Pressure	800 to 1100 hPa, 23.6 to 32.5 inch Hg	
	Humidity	0 to 100 %RH, non-condensing	
Enclosure	IP 66, stainless steel		
Size (W x H x D, approx.)	350 x 300 x 170 mm, 13.8" x 11.8" x 6.7", each		
Weight (approx.)	9 kg, 19,8 lbs, each, including back plate		
Approvals	ATEX	II 2GD EEx d [ia] IIC T6/T5, -40 to + 40 / + 60 °C	
	IECEx	Ex d [ia] IIC T6/T5, -40 to + 40 / + 60 °C	
	UL	Class I, Div 1, Group C, D	
	CSA, NRTL/C	Class I, Div 1, Group C, D	



HEADQUARTERS

Dräger Safety AG & Co. KGaA
Revalstrasse 1
23560 Lübeck, Germany

www.draeger.com

SYSTEM CENTERS

P. R. CHINA

Beijing Fortune Draeger Safety
Equipment Co., Ltd.
A22 Yu An Rd, B Area,
Tianzhu Airport Industrial Zone,
Shunyi District, Beijing 101300
Tel +86 10 80 49 80 00
Fax +86 10 80 49 80 05

GERMANY

Dräger Safety AG & Co. KGaA
Revalstrasse 1,
23560 Lübeck
Tel +49 451 882-2794
Fax +49 451 882-4991

FRANCE

Dräger Safety France SAS
3c route de la Fédération, BP 80141
67025 Strasbourg Cedex 1
Tel +33 3 88 40 59 29
Fax +33 3 88 40 76 67

SINGAPORE

Draeger Safety Asia Pte Ltd
67 Ayer Rajah Crescent #06-03
Singapore 139950
Tel +65 68 72 92 88
Fax +65 65 12 19 08

UNITED KINGDOM

Draeger Safety UK Ltd.
Blyth Riverside Business Park
Blyth, Northumberland NE24 4RG
Tel +44 1670 352 891
Fax +44 1670 544 475

USA

Draeger Safety, Inc.
505 Julie Rivers, Suite 150
Sugar Land, TX 77478
Tel +1 281 498 1082
Fax +1 281 498 5190